

APPLICATION

- Widely used in residential and shutter applications.
- To cover any width of opening, any number of doors can be used.
- To accommodate different building designs, doors can slide to one or both sides.
- Where doors are fitted externally, a canopy is recommended.

DOOR SPECIFICATION

Track System: Single Run 80

For Individual Doors:

Max Door Height 3000mm

Max Door Weight Nylon Tyre Hanger 80kg

Door Thickness 19-48mm

For ease of operation it is recommended that the door width should not exceed 75% of door height.

Timber doors for interior use can be of flush construction or glazed.

Timber doors for industrial applications should be framed, ledged and braced.

Metal doors should be constructed of box section, channel or angle framing, well braced and clad with flat or corrugated sheets.

HARDWARE SPECIFICATION

Track: 120

Material Aluminium

Standard lengths 2000mm, 3000mm, 4000mm and 6000mm

Aluminium track available in mill or clear anodised.

Brackets:

Face fitted Stainless Steel, angle 1SS/250

Double face fitted bracket SS 5SS/120

Fit at 600mm maximum centres.

Hangers (2 per door):

Hangers Full Stainless 57SS/ENP

Timber Doors – plate (surface) 57ENP

All hangers suffixed 'N' have nylon tyre wheels and are fitted with ball race bearings.

Nylon tyre wheel hangers should not be used on installations involving temperatures exceeding 80°C.

Guides:

Timber Doors – SS plate fitting 106E/94

Metal Doors – box frame 104PL/97

Timber Doors – nylon guide 101N

Multiple Doors 102W/94

Channels: 94A Aluminium

94B Brass



94PPA Aluminium & Polypropylene

Standard lengths


94A, 94B and 94PPA 2000mm, 3000mm, 4000mm, 6000mm

Accessories:


Bow Handles, Flush Pulls, Surface Bolts,
Flush Bolts, Door Stops.

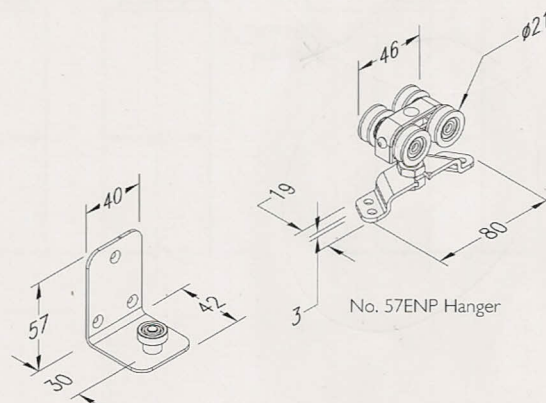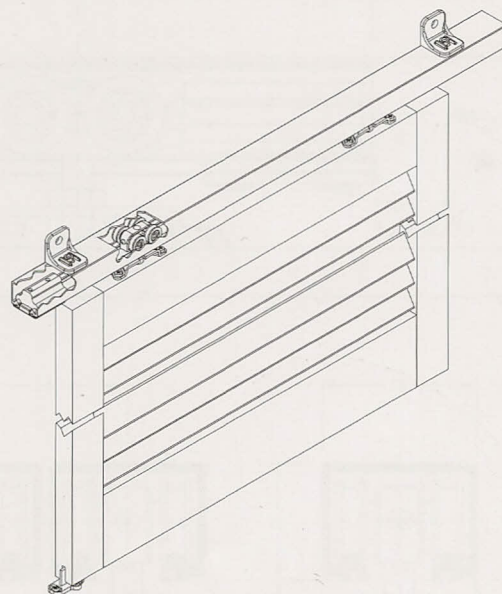


No. 102W/94 Guide




No. 101N Guide




No. 5SS/120 Bracket



No. 120DS Door Stop



No. 106E/94 Guide




No. 1SS/250 Bracket

ARCHITECTURAL DETAILS

Single Run 80

FOR TOP HUNG STRAIGHT SLIDING DOORS, MAX. 80kg EACH

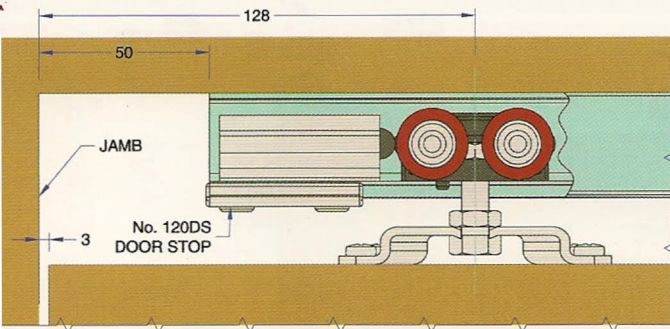

TRACK FIXING CENTRES 20mm FROM EACH END 500mm MAX.

